

LF-2000 SOLDERING STATION




Humanism interface :
The angle of control panel is conform to humanism, the huge NUMs and buttons are easy to read and set



Multiplex fitting combination :
Provides many kinds of for the customer selects the disposition, enable the customer to obtain a more reasonable enhancement in the economic efficiency.



Hi-power heater :
Temperature climbs fast, favored by lead free soldering



Build-up grounding :
Can link up ESD wrist strap

Product Features:

Password lock : Convenient for control

Auto sleep : Save power and the life of tip

Auto close : The station will shut down after 40 min without using

Real-temp modification : Real temperature can modify Manually


Minitype station : Less desktop occupation

Sensor fail notification : When the sensor failed, "S-E" will Be shown, SIA will power off

Sensor fail notification : When the sensor failed, "S-E" will Be shown, SIA will power off

Alloy aluminium shell : Block off electromagnetic interfere high strength configuration and less heat cumulation

Heating curve determination:

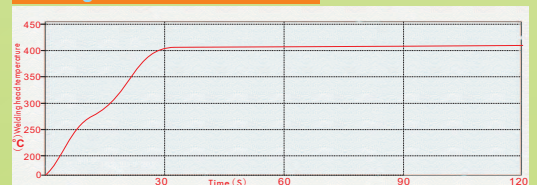

SPECIFICATION:

Input power	220-240Vac 50Hz
Wattage	100W
Temperature range	200-450 °C 392-842 °F
Standard tip	44-710652



XYTRONIC CO.,LTD
<http://www.xytronic.com>